

primus®

GET AHEAD IN LAUNDRY



TX 14/14 TUMBLE DRYER



LOWER ENERGY CONSUMPTION
To save your bottom line



SHORTER DRYING CYCLES
For even more productive laundry operations



ERGONOMIC IMPROVEMENTS
For easier operation



MOISTURE SENSING
Innovative electro conductivity technology ensures higher accuracy and prevents overdrying



FLEXIBLE DOOR OPENING
Reversible door design and new magnetick locking system



CONNECTIVITY
Integrated WiFi module as a standard for Xcontrol FlexPlus

FEATURES & BENEFITS


Features	Options	Control
- Frequency controlled motor - Lint filter drawer for an user friendly maintenance - Large door opening for easy loading and unloading - Reversing drum as standard - Standard galvanized drum with large diameter	- Coin operated version (VEND) - Stainless steel front panel - Stainless steel drum - Double door glass - Residual moisture control: - electro conductivity of linen measured with ribs - safe drying of delicate linen and overdrying prevention	3 tiers of controls available - Xtronic - micro processor for VEND and OPL with 4 temperature levels - Xtronic OPL - advanced microprocessor for OPL only with 9 editable programs - Xcontrol FlexPlus - 5" multilingual touch screen - WiFi as standard execution for Xcontrol FlexPlus - Cloud connectivity for 24/7 machine monitoring possible - USB port for easy firmware updates, configuration and program uploads (Touch control)

Consult your sales representative for availability

Primus by Alliance Laundry Systems

SPECIFICATIONS

TYPE	TX14/14	
CAPACITY		
Capacity 1:18	kg	2×16
Capacity 1:22	kg	2×13
Drum volume	l	2×285
Drum diameter	mm	2×760
AIRFLOW	m³/h	700/700; 1400
DRYING AVERAGE	g/min	2×217
MOTORS		
Fan	kW	2×0,37
Drive	kW	2×0,37
Electrical connection	208-240V 50/60Hz 1Ph - optional for gas and steam 208-240V 50/60Hz 3Ph - optional 380-415V +N 50/60Hz 3Ph - standard 380-415V 50/60Hz 3Ph - optional 440-480V 50/60Hz 3Ph - optional	
ELECTRICAL HEATING		
Energy	kW	2×13,5
GAS HEATING		
Energy	kW	2×17,5
Gas connection	inch	2×½"
Exhaust	mm	Ø 200
DIMENSIONS		
H×W×D	mm	2010×795×1245
Net weight	kg	285
TRANSPORT DATA		
Packed H×W×D	mm	2090×855×1320
Gross weight	kg	305

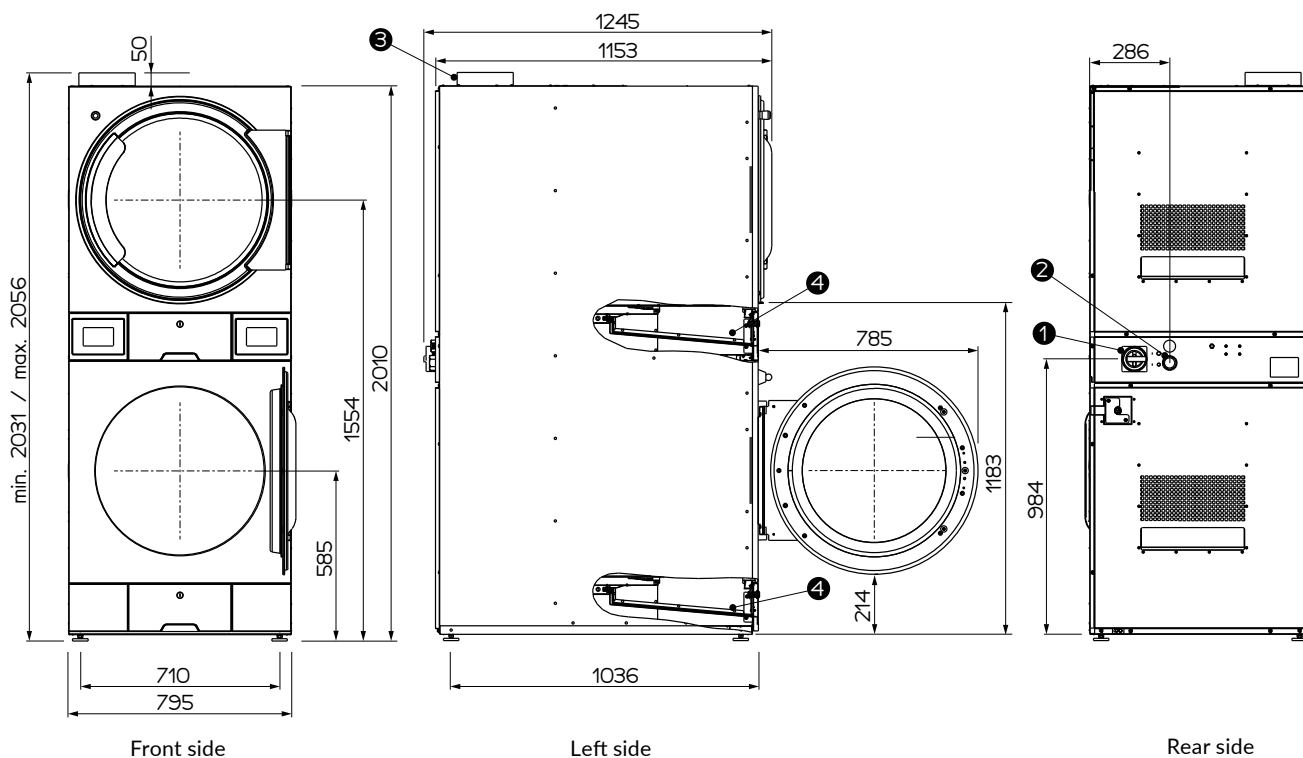

1. Main Switch
2. Main power supply
3. Exhaust
4. Filter